


MATERIAL HANDLING

Flat Webbing Sling – Model KFS

Features:

- Made from high tensile polyester (PES).
- Manufactured according to machine directive 89/392/CE and EN 1492-1
- Low elongation
- Color coded according to EN 1492-1
- UV-resistant, eliminating material ageing or embrittlement
- Moisture-resistant fabric, thus preventing frost damage (up to approx. -40°C)

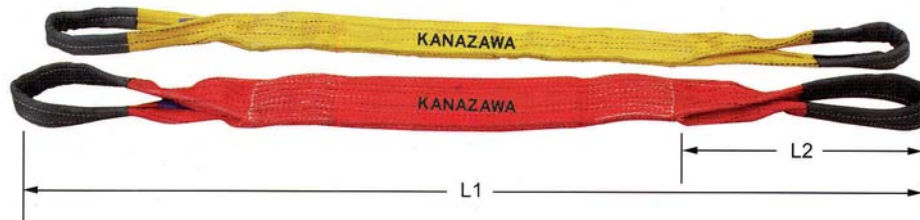

WLL	Lifting method	SWL IN KG WITH ONE WEBBING SLING					SWL IN KG WITH TWO WEBBING SLINGS			
		Straight	Choke	basket, inclination angle β			angle of inclination β			
				up to $\beta=7^\circ$	up to $\beta=7^\circ-45^\circ$	from to $\beta=45^\circ-60^\circ$	straight up to $\beta=45^\circ$	choke up to $\beta=45^\circ$	straight from-to $\beta=45^\circ-60^\circ$	choke from-to $\beta=45^\circ-60^\circ$
Factor	1.0	0.8	2.0	1.4	1.0	1.4	1.12	1.0	0.8	
1000kg	Violet	1000	800	2000	1400	1000	1400	1120	1000	800
2000kg	Green	2000	1600	4000	2800	2000	2800	2240	2000	1600
3000kg	Yellow	3000	2400	6000	4200	3000	4200	3360	3000	2400
4000kg	Grey	4000	3200	8000	5600	4000	5600	4480	4000	3200
5000kg	Red	5000	4000	10000	7000	5000	7000	5600	5000	4000
6000kg	Brown	6000	4800	12000	8400	6000	8400	6720	6000	4800
8000kg	Blue	8000	6400	16000	11200	8000	11200	8960	8000	6400
10000kg	Orange	10000	8000	20000	14000	10000	14000	11200	10000	8000
12000kg	Orange	12000	9600	24000	16800	12000	16800	13440	12000	9600

(Violet) ■
1 Ton 25MM=1"

Code No.	Size
AQ00074	1M
AQ00075	2M
AQ00076	3M
AQ00077	4M
AQ00078	5M
AQ00079	6M
AQ00080	8M
AQ00081	10M

(Green) ■
2 Ton 50MM=2"

Code No.	Size
AQ00082	1M
AQ00083	2M
AQ00084	3M
AQ00085	4M
AQ00086	5M
AQ00087	6M
AQ00088	8M
AQ00089	10M

(Yellow) ■
3 Ton 75MM=3"

Code No.	Size
AQ00090	2M
AQ00091	3M
AQ00092	4M
AQ00093	5M
AQ00094	6M
AQ00095	8M
AQ00096	10M

(Grey) ■
4 Ton 100MM=4"

Code No.	Size
AQ00097	2M
AQ00098	3M
AQ00099	4M
AQ00100	5M
AQ00101	6M
AQ00102	8M
AQ00103	10M

(Red) ■
5 Ton 125MM=5"

Code No.	Size
AQ00104	2M
AQ00105	3M
AQ00106	4M
AQ00107	5M
AQ00108	6M
AQ00109	8M
AQ00110	10M

(Brown) ■
6 Ton 150MM=6"

Code No.	Size
AQ00111	2M
AQ00112	3M
AQ00113	4M
AQ00114	5M
AQ00115	6M
AQ00116	8M
AQ00117	10M

(Blue) ■
8 Ton 200MM=8"

Code No.	Size
AQ00118	2M
AQ00119	3M
AQ00120	4M
AQ00121	5M
AQ00122	6M
AQ00123	8M
AQ00124	10M

(Orange) ■
10 Ton 250MM=10"

Code No.	Size
AQ00125	3M
AQ00126	4M
AQ00127	5M
AQ00128	6M
AQ00129	8M
AQ00130	10M
AQ00131	12M

(Orange) ■
12 Ton 300MM=12"

Code No.	Size
AQ00132	3M
AQ00133	4M
AQ00134	5M
AQ00135	6M
AQ00136	8M
AQ00137	10M
AQ00138	12M

Allinton Engineering & Trading Pte Ltd

Head Office: Block 803, King George's Avenue #01-234 Singapore 200803. Tel: 6296 0679 (10 lines) 6292 7728 Fax: 6297 0024

Branch Office: 21 Tuas Basin Link Singapore 638782 Tel: 6265 1888 (10 lines) Fax: 6265 5623


Web-site: <http://www.allinton.com.sg> E-mail: allinton@singnet.com.sg

KANAZAWA™

MATERIAL HANDLING

Round Slings – Model KRS

- The Kanazawa round slings are easy to use, efficient in operation gentle on surface contact.
- They come with a label giving length and tonnage.
- The round sling inner core is made from high tensile polyester fibre which is wound continuously without a join to provide the maximum possible strength.
- This core is protected by a tough woven tubular sleeve also made from polyester without side stitch.
- Polyester round sling with two woven heavy sleeve.
- Manufactured according to machinery directive 98/37/EC and EN1492-2.
- Colour coded according to EN1492-2.
- Capacity stripes: each stripe is equal to 1 tonne capacity.
- The safe working load is clearly and continuously printed on the sleeve.
- Low elongation, extremely wear-resistant.

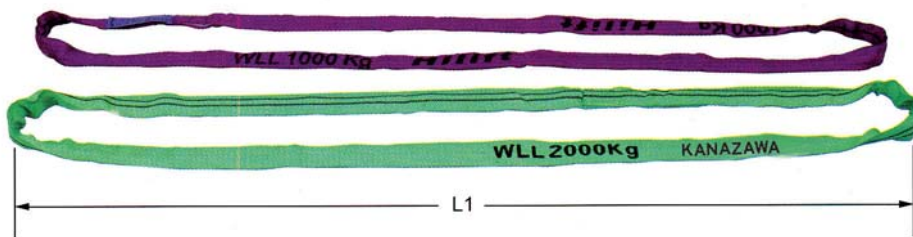

WLL	Lifting method	SWL IN KG WITH ONE ROUND SLING						SWL IN KG WITH TWO ROUND SLINGS				
		Straight Lift	Choke Hitch	basket, inclination angle β				angle of inclination β				
				up to $\beta=7^\circ$	up to $\beta=7^\circ-45^\circ$	from-to $\beta=45^\circ-60^\circ$	up to $\beta=45^\circ$	from-to $\beta=45^\circ-60^\circ$	straight up to $\beta=45^\circ$	choke up to $\beta=45^\circ$	straight from-to $\beta=45^\circ-60^\circ$	choke from-to $\beta=45^\circ-60^\circ$
Factor	1.0	0.8	2.0	1.4	1.0	0.7	0.5	1.4	1.12	1.0	0.8	
1000kg	Violet	1000	800	2000	1400	1000	700	500	1400	1120	1000	800
2000kg	Green	2000	1600	4000	2800	2000	1400	1000	2800	2240	2000	1600
3000kg	Yellow	3000	2400	6000	4200	3000	2100	1500	4200	3360	3000	1800
4000kg	Grey	4000	3200	8000	5600	4000	2800	2000	5600	4480	4000	3200
5000kg	Red	5000	4000	10000	7000	5000	3500	2500	7000	5600	5000	4000
6000kg	Brown	6000	4800	12000	8400	6000	4200	3000	8400	6720	6000	4800
8000kg	Blue	8000	6400	16000	11200	8000	5600	4000	11200	8960	8000	6400
10000kg	Orange	10000	8000	20000	14000	10000	7000	5000	14000	11200	10000	8000
12000kg	Orange	12000	9600	24000	16800	12000	8400	6000	16800	13440	12000	9600

(Violet) 1 Ton

Code No.	Size
AQ03666	1M
AQ03667	2M
AQ03668	3M
AQ03669	4M
AQ03670	5M
AQ03671	6M

(Green) 2 Ton

Code No.	Size
AQ03672	1M
AQ03673	2M
AQ03674	3M
AQ03675	4M
AQ03676	5M
AQ03677	6M

(Yellow) 3 Ton

Code No.	Size
AQ03678	1M
AQ03679	2M
AQ03680	3M
AQ03681	4M
AQ03682	5M
AQ03683	6M

(Grey) 4 Ton

Code No.	Size
AQ03684	1M
AQ03685	2M
AQ03686	3M
AQ03687	4M
AQ03688	5M
AQ03689	6M

(Red) 5 Ton

Code No.	Size
AQ03690	1M
AQ03691	2M
AQ03692	3M
AQ03693	4M
AQ03694	5M
AQ03695	6M

(Brown) 6 Ton

Code No.	Size
AQ03696	1.5M
AQ03697	2M
AQ03698	3M
AQ03699	4M
AQ03700	5M
AQ03701	6M

(Blue) 8 Ton

Code No.	Size
AQ03702	2M
AQ03703	3M
AQ03704	4M
AQ03705	5M
AQ03706	6M

(Orange) 10 Ton

Code No.	Size
AQ00707	3M
AQ00708	4M
AQ00709	5M
AQ00710	6M

(Orange) 12 Ton

Code No.	Size
AQ00711	3M
AQ00712	4M
AQ00713	5M
AQ00714	6M

Allinton Engineering & Trading Pte Ltd

Head Office: Block 803, King George's Avenue #01-234 Singapore 200803. Tel: 6296 0679 (10 lines) 6292 7728 Fax: 6297 0024

Branch Office: 21 Tuas Basin Link Singapore 638782 Tel: 6265 1888 (10 lines) Fax: 6265 5623

Web-site: <http://www.allinton.com.sg> E-mail: allinton@singnet.com.sg

KANAZAWA™