



HYDRAULIC

Cable Roller & Sheeves

- Wide range of cable pulling grips to meet all pulling needs
- High quality & durable

Code No	Cable Range Diameter	Max Force kN	Length		Swivel Type
			Mesh	Eye	
			DOUBLE WEAVED WITH ROTATING EYE		
AQ30438	12.7-15.5	4.9	279.4	127	
AQ30440	15.6-18.9	6	279.4	127	
AQ30444	19.0-25.3	6	508	152.4	
AQ30446	25.4-31.5	11.3	508	177.8	
AQ30448	31.6-38.0	11.3	508	177.8	
AQ30450	38.1-50.7	14.5	635	177.8	
AQ30452	50.8-63.3	16.4	660.4	203.2	
AQ30454	63.5-76.1	29.3	711.2	254	
AQ30456	76.2-88.8	36.4	762	254	
AQ30458	88.9-101.5	42.7	812.8	254	
AQ30472	101.6-126.8	42.7	838.2	254	
AQ30470	127-152.3	42.7	1524	254	


Swivels

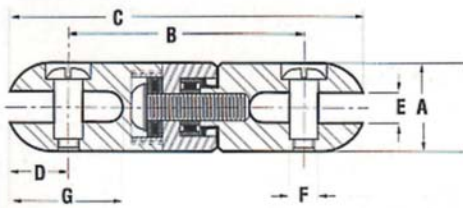

- Helps eliminate winding and tangling of rope and cable during pull
- Connects grip and pulling rope
- All stainless steel body construction
- Efficient thrust and roller bearing construction allows smooth rotation, even under full load

Code No.	Maximum Rated Capacity		A Diameter (mm)	B	C	D	E	F Diameter	G	Weight
	Lbs.	kN								
AQ39106	2,500	11.1	22.2	66.7	88.9	11.1	9.5	7.9	24.6	.16
AQ39107	5,000	22.1	31.8	77.8	104.5	13.5	12.7	10.3	32.5	.45
AQ39108	7,000	31.1	34.9	83.3	115.1	15.9	14.3	12.7	34.9	.45
AQ39109	10,000	44.4	41.3	100	138.1	19.1	15.9	15.9	43.7	.91
AQ39110	15,000	66.7	50.8	119.1	166.7	23.8	19.1	17.5	50.8	1.81
AQ39111	25,000	111.2	63.5	144.5	214.3	30.2	25.4	22.2	70.6	3.18

Rope to Swivels Connectors

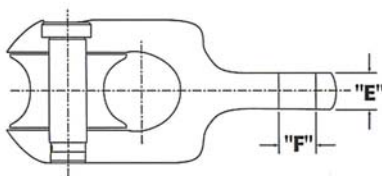

- Rope to swivel connectors connect the cable pulling rope, up to 1" (25.4cm) in diameter, to the pulling swivel
- Makes connecting the pulling rope and the pulling swivel easier
- Connectors feature a removable sheave for rope eye

Code No.	Max. Rated Cap. in Conduit or Underground		Max. Rated Capacity Overhead kN	Diameter mm	Length mm	"E" mm	"F" mm	Use on swivel
	Lbs.	kN						
AQ39905	5,000	22.2	13.3	50.8	119	11.12	10.32	39107
AQ39904	7,000	31.1	18.6	50.8	119	12.7	12.7	39108
AQ39903	10,000	44.4	26.7	50.8	119	14.3	15.9	39109
AQ39902	10,000	44.4	26.7	50.8	119	17.5	17.5	39110

Allinton Engineering & Trading Pte Ltd

Head Office: Block 803, King George's Avenue #01-234 Singapore 200803. Tel: 6296 0679 (10 lines) 6292 7728 Fax: 6297 0024

Branch Office: 21 Tuas Basin Link Singapore 638782 Tel: 6265 1888 (10 lines) Fax: 6265 5623

Web-site: <http://www.allinton.com.sg> E-mail: allinton@singnet.com.sg